



PASSENGER CAR TYRES >SPORTY



FTZ SPORT

Key Features

- In its low profile, high performance series, Silverstone's FTZ Sport tyre has been a popular choice among motorists seeking superb speed capabilities with exciting handling characteristics. The forte of this low profile, pure performance tyre is its superb traction and steering precision, immense stopping power, and optimal performance levels in both dry or wet weather conditions.
- The FTZ Sport, with its stylish V-Groove directional design is much more than a good-looking tyre. The deep and wide grooves in the V-configuration provide superior aquaplaning resistance in wet weather. The tyre displays superb stability and precision even when coming into contact with unexpected patches of water. Despite its low profile build, the FTZ Sport surprises users with the superb levels of ride comfort it provides. The tyre absorbs road irregularities commendably and minimises road noise which is usually associated with performance tyres. The ideal choice for those discerning drivers demanding top-notch performance without totally sacrificing comfort.

Tyre Size	Load Speed Index	Rim Width [inch]		Max Load		Max Speed [km/h]	Section Width [mm]	Overall Diameter [mm]	Static Load [mm]	Rolling Circum'ce [mm]	Max Pressure	
		R	P	Single	Dual						[psi]	[kPa]
65 Series												
195/65R15	91V	6	5.5 - 7.0	615	-	240	201	635	289	1925	36	250
60 Series												
195/60R15	88V	6	6.5 - 7.0	560	-	240	201	615	280	1865	36	250
55 Series												
195/55R14	82V	6	5.5 - 7.0	475	-	240	201	570	259	1728	36	250
195/55R15	85V	6	5.5 - 7.0	515	-	240	201	595	271	1804	36	250
205/55R15	88V	6	5.5 - 7.5	560	-	240	214	607	276	1840	36	250
205/55R16	91V	6.5	5.5 - 7.5	615	-	240	214	632	288	1916	36	250
205/55ZR16	91W	6.5	5.5 - 7.5	615	-	270	214	632	288	1916	36	250
215/55R16	93V	7	6.0 - 7.5	650	-	240	226	642	292	1947	36	250
215/55ZR16	93W	7	6.0 - 7.5	650	-	270	226	642	292	1947	36	250
225/55R16	95V	7	6.0 - 8.0	690	-	240	233	654	298	1983	36	250
255/55ZR16	95W	7	6.0 - 8.0	690	-	270	233	654	298	1983	36	250

Tyre Size	Load Speed Index	Rim Width [inch]		Max Load		Max Speed [km/h]	Section Width [mm]	Overall Diameter [mm]	Static Load [mm]	Rolling Circum'ce [mm]	Max Pressure	
		R	P	Single	Dual						[psi]	[kPa]
50 Series												
195/50R15	82V	6	5.5 - 7.0	475	-	240	201	577	263	1749	36	250
205/50R15	86V	6.5	5.5 - 7.5	530	-	240	214	587	267	1780	36	250
205/50ZR15	88W	6.5	5.5 - 7.5	530	-	270	214	587	267	1780	36	250
215/50R15	88V	7	6.0 - 7.0	560	-	240	226	597	272	1810	36	250
215/50ZR15	88W	7	6.0 - 7.0	560	-	270	226	597	272	1810	36	250
225/50R15	91V	7	6.0 - 8.0	615	-	240	233	607	276	1840	36	250
225/50ZR15	91W	7	6.0 - 8.0	615	-	270	233	607	276	1840	36	250
205/50R16	87V	6.5	5.5 - 7.5	545	-	240	214	612	278	1856	36	250
205/50ZR16	87W	6.5	5.5 - 7.5	545	-	270	214	612	278	1856	36	250
215/50R16	90V	7	6.0 - 7.5	600	-	240	226	622	285	1886	36	250
225/50R16	92V	7	6.0 - 8.0	630	-	240	233	632	288	1916	36	250
225/50ZR16	92W	7	6.0 - 8.0	630	-	270	233	632	288	1916	36	250
235/50R16	95V	7.5	6.5 - 8.5	690	-	240	245	642	292	1947	36	250
235/50ZR16	95W	7.5	6.5 - 8.5	690	-	270	245	642	292	1947	36	250
245/50R16	97V	7.5	7.0 - 8.5	730	-	240	253	652	297	1977	36	250
245/50ZR16	97W	7.5	7.0 - 8.5	730	-	270	253	652	297	1977	36	250
205/50ZR17	98W	6.5	5.5 - 7.5	580	-	270	214	638	290	1934	36	250
45 Series												
215/45R15	84V	7	7.5 - 8.5	500	-	240	213	575	262	1743	36	250
215/45ZR15	84W	7	7.5 - 8.5	500	-	270	213	575	262	1743	36	250
205/45R16	83V	7	6.5 - 7.5	487	-	240	206	590	268	1789	36	250
205/45ZR16	83W	7	6.5 - 7.5	487	-	270	206	590	268	1789	36	250
225/45R16	89V	7.5	7.0 - 8.0	580	-	240	225	608	227	1843	36	250
225/45ZR16	89W	7.5	7.0 - 8.0	580	-	270	225	608	227	1843	36	250
245/45R16	94V	8	7.5 - 9.0	670	-	240	243	626	285	1893	36	250
245/45ZR16	94W	8	7.5 - 9.0	670	-	270	243	626	285	1893	36	250
215/45R17	87V	7	7.0 - 8.0	545	-	240	213	626	285	1898	36	250
215/45ZR17	87W	7	7.0 - 8.0	545	-	270	213	626	285	1898	36	250
225/45R17	90V	7.5	7.0 - 8.5	600	-	240	225	633	288	1919	36	250
225/45ZR17	90W	7.5	7.0 - 8.5	600	-	270	225	633	288	1919	36	250
235/45R17	93V	8	7.5 - 9.0	650	-	240	236	644	293	1953	36	250
235/45ZR17	93W	8	7.5 - 9.0	650	-	270	236	644	293	1953	36	250

Tyre Size	Load Speed Index	Rim Width [inch]		Max Load		Max Speed [km/h]	Section Width [mm]	Overall Diameter [mm]	Static Load [mm]	Rolling Circum'ce [mm]	Max Pressure	
		R	P	Single	Dual						[psi]	[kPa]
45 Series												
245/45ZR17	95V	8	7.5 - 9.0	690	-	240	243	652	297	1977	36	250
245/45ZR17	95W	8	7.5 - 9.0	690	-	270	243	652	397	1977	36	250
40 Series												
215/40R16	82V	7.5	7.0 - 8.5	475	-	240	218	578	270	1752	36	250
215/40ZR16	82W	7.5	7.0 - 8.5	475	-	270	218	578	270	1752	36	250
205/40R17	80V	7.5	7.0 - 8.5	450	-	240	212	596	278	1807	36	250
205/40ZR17	80W	7.5	7.0 - 8.5	450	-	270	212	596	278	1807	36	250
215/40R17	83V	7.5	7.0 - 8.5	487	-	240	218	604	283	1831	36	250
215/40ZR17	83W	7.5	7.0 - 8.5	487	-	270	218	604	283	1831	36	250
235/40R17	90V	8.5	8.0 - 9.5	600	-	240	241	620	284	1879	36	250
235/40ZR17	90W	8.5	8.0 - 9.5	600	-	270	241	620	284	1879	36	250
245/40R17	91V	8.5	8.0 - 9.5	615	-	240	248	628	287	1904	36	250
245/40ZR17	91W	8.5	8.0 - 9.5	615	-	270	248	628	287	1904	36	250
255/40R17	94V	9	8.5 - 10.0	670	-	240	260	636	289	1928	36	250
255/40ZR17	94W	9	8.5 - 10.0	670	-	270	260	636	289	1928	36	250
35 Series												
215/35ZR17	79W	7.5	7.0 - 8.5	437	-	270	218	582	270	1764	36	250



PASSENGER CAR TYRES



Key Features

- Incorporates Silverstone's most advanced technology.
- Sinusoidal tread pattern delivers extra high speed stability and tenacious grip to meet the demands of modern motoring.

POWERBLITZ 2000

Tyre Size	Load Speed Index	Rim Width [inch]		Max Load		Max Speed [km/h]	Section Width [mm]	Overall Diameter [mm]	Static Load [mm]	Rolling Circum'ce [mm]	Max Pressure	
		R	P	Single	Dual						[psi]	[kPa]
70 Series												
175/70R13	82H	5	5.5 - 6.0	475	-	210	177	576	265	1760	36	250
65 Series												
165/65R13	77T	5	4.5 - 6.0	412	-	190	170	544	248	1649	36	250
165/65R14	79T	5	4.5 - 6.0	437	-	190	170	570	259	1728	36	250
175/65R14	82T	5	5.0 - 6.0	475	-	190	177	584	266	1771	36	250



PASSENGER CAR TYRES >STANDA



Key Features

- Incorporates a unique sinusoidal tread pattern.
- Offers exceptional stability, manoeuvrability and aquaplaning resistance.
- Provides a smooth and quiet ride.

POWERBLITZ 7000

Tyre Size	Load Speed Index	Rim Width [inch]		Max Load		Max Speed [km/h]	Section Width [mm]	Overall Diameter [mm]	Static Load [mm]	Rolling Circum'ce [mm]	Max Pressure	
		R	P	Single	Dual						[psi]	[kPa]
70 Series												
175/70R13	82H	5	5.5 - 6.0	475	-	210	177	576	265	1760	36	250
65 Series												
175/65R14	82T	5	5.0 - 6.0	475	-	190	177	584	266	1771	36	250



PASSENGER CAR TYRES



STV 128

Key Features

- Rib-block tread pattern and an advanced rubber compound formulation gives lasting mileage and excellent economy.
- Versatile with superb roadholding. Ideal for highway travel in all weather conditions.

Tyre Size	Load Speed Index	Rim Width [inch]		Max Load		Max Speed [km/h]	Section Width [mm]	Overall Diameter [mm]	Static Load [mm]	Rolling Circum'ce [mm]	Max Pressure	
		R	P	Single	Dual						[psi]	[kPa]
80 Series												
135R13	69T	4	3.5 - 4.5	325	-	190	137	548	249	1665	33	230
145R13	74T	4	3.5 - 5.0	375	-	190	147	566	257	1720	32	220
155R13	78S	4.5	4.0 - 5.5	425	-	180	157	578	263	1750	32	220
165R13	82T	4.5	4.0 - 5.5	475	-	190	167	596	271	1800	33	230
75 Series												
165/75R13	81S	4.5	4.0 - 5.5	462	-	180	165	578	263	1750	36	250
175/75R13	84T	5	5.5	500	-	190	177	592	267	1795	36	250
185/75R14	89H	5	4.5 - 6.5	580	-	210	184	634	288	1923	36	250
195/75R14(reinf)	95H	5.5	5.0 - 7.0	690	-	210	196	648	295	1965	44	300

Tyre Size	Load Speed Index	Rim Width [inch]		Max Load		Max Speed [km/h]	Section Width [mm]	Overall Diameter [mm]	Static Load [mm]	Rolling Circum'ce [mm]	Max Pressure	
		R	P	Single	Dual						[psi]	[kPa]
70 Series												
145/70R12	69T	4.5	4.0 - 5.0	325	-	190	150	509	235	1560	36	250
155/70R13	75T	4.5	5.0 - 5.5	387	-	190	157	548	253	1675	36	250
165/70R13	79T	5	4.5 - 6.0	437	-	190	170	562	260	1725	36	250
175/70R14	82H	5	5.5 - 6.0	475	-	210	177	576	265	1760	36	250
65 Series												
185/65R13	84H	5.5	5.0 - 6.5	500	-	210	189	570	259	1728	36/41	250/280
195/65R14	89H/V	6	5.5 - 7.0	580	-	210/240	201	610	278	1850	36/41	250/280
215/65R14	95H	6.5	6.0 - 7.5	690	-	210	221	636	290	1926	36	250
60 Series												
185/60R14	82H/V	5.5	5.0 - 6.5	475	-	210/240	189	578	263	1752	36/41	250/280
195/60R15	88H/V	6	5.5 - 7.0	560	-	210/240	201	615	280	1865	36/41	250/280
215/60R15	94H/V	6.5	6.0 - 7.5	670	-	210/240	221	639	291	1937	36/41	250/280



4 X 4 TYRES > HIGHWAY TERRAIN



HT-778

Key Features


- Developed specially for on-road driving and offers excellent ride comfort with smooth and quiet highway cruising characteristics.
- Adopts a new 4x4 tyre construction technique to ensure maximum performance.
- Computerised tread pitch design provides superior grip and even wear rate.
- Multi-siping orientation enhances traction.
- Incorporates longitudinal center groove to provide high speed tracking stability.
- Sinusoidal groove configuration enhances hydro planing resistance and also ensures well balanced performance in both dry and wet conditions.

Tyre Size	Load/Speed Index	Type	Rim Width		Section Width [mm]	Overall Diameter [mm]
			[inch]	Recommended/ Permitted		
235/75R15	105S	TL	6.5	6.0 - 8.0	235	733
205/70R15	96S	TL	6	5.0 - 7.0	209	669
255/70R15	108S/T	TL	7.5	6.5 - 8.5	260	739
265/70R15	112S	TL	8	7.0 - 9.0	272	753
30x9.50R15LT	104S	TL	7.5	6.5 - 8.5	240	750
31x10.50R15LT	109S	TL	8.5	7.0 - 9.0	268	775
265/75R16	116S	TL	7.5	7.0 - 9.0	267	804
235/70R16	105S/T	TL	7	6.0 - 8.0	240	736
245/70R16	107S/T	TL	7	6.5 - 8.0	248	750
265/70R16	112S	TL	8	7.0 - 9.0	272	778
275/70R16	114S	TL	8	7.0 - 9.0	279	792
255/65R16	109S/T	TL	7.5	7.0 - 9.0	260	738



4 X 4 TYRES > HIGHWAY TERRAIN

Key Features

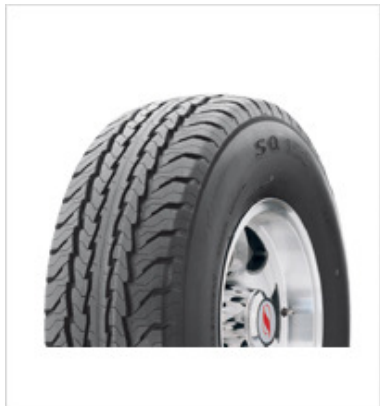

SQ178

- Developed specifically for on-road driving and gives excellent ride comfort with smooth and quiet highway cruising characteristics
- Special construction ensures even wear and higher mileage.

Tyre Size	Load/Speed Index	Type	Rim Width [inch]		Section Width [mm]	Overall Diameter [mm]
			Recommended/ Permitted			
215R15	100S	TL	6	5.5 - 7.0	218	724
205/70R15	95Q/S	TL	6	5.0 - 7.0	209	669
31x10.50R15LT	109Q/S	TL	8.5	7.0 - 9.0	268	775
205R16 (Reinf)	104S	TL	6	5.0 - 7.0	208	736
215/80R16	103Q/S	TL	6	5.5 - 7.0	216	750



4 X 4 TYRES > ALL TERRAIN

Key Features



The "Master Of All Terrain"


A balanced construction design makes this tyre a joy to use both on and off-road. On-road, it delivers a reasonably comfortable ride, while being able to easily surmount most off-road terrain.

AT-117 SPECIAL

Tyre Size	Load/Speed Index	Type	Rim Width [inch] Recommended/ Permitted		Section Width [mm]	Overall Diameter [mm]
215R15	100S	TL	6	5.5 - 7.0	218	724
205/70R15	95Q/S	TL	6	5.0 - 7.0	209	669
31x10.50R15LT	109Q/S	TL	8.5	7.0 - 9.0	268	775
205R16 (Reinf)	104S	TL	6	5.0 - 7.0	208	736
215/80R16	103Q/S	TL	6	5.5 - 7.0	216	750



4 X 4 TYRES > ALL TERRAIN

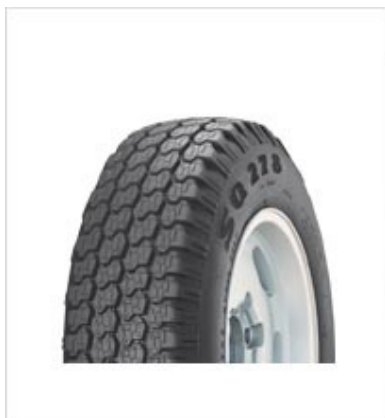

SQ278


Key Features

- Ideal for both on and off-road activities.
- Radial construction offers good traction on loose and rough surfaces by virtue of its block tread pattern with deep grooves, yet cruises smoothly on tarmac

Tyre Size	Load/Speed Index	Type	Rim Width [inch] Recommended/ Permitted		Section Width [mm]	Overall Diameter [mm]
			5.5	5.0 - 6.5		
195R15	94S	TL	5.5	5.0 - 6.5	198	690
215R15	100S	TL	6	5.5 - 7.0	218	724



4 X 4 TYRES > MUD TERRAIN

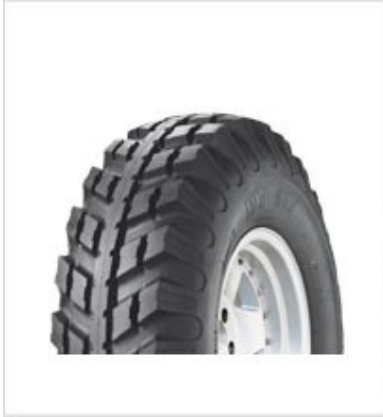

MT-117

Key Features

- Official tyre for the 18,000km, 32-day Silverstone Inner Mongolia Expedition
- Known as the "King of 4x4 Tyres".
- Rugged tyre construction makes it ideal for the toughest off-road challenges.

Tyre Size	Load/Speed Index	Type	Rim Width [inch]		Section Width [mm]	Overall Diameter [mm]
			Recommended/ Permitted			
285/85-16 6PR	116/114L	TT	7.5	7.0 - 8.0	285	900
750-16C 8PR	112/110L	TT	6	5.5 - 6.5	202	824
750-16C 10PR	116/114L	TT	6	5.5 - 6.5	202	824
750-16C 12PR	121/120L	TT	6	5.5 - 6.5	202	824



4 X 4 TYRES > MUD TERRAIN

Key Features

Official tyre for the 17,000km, 33-day Silverstone TransAfrica Expedition. Bestowed the "MITI Product Excellence Award 1998"

Its superb all-terrain off-road capabilities and robust construction make it an excellent choice when encountering varying ground conditions.



MT-117 EX

Tyre Size	Load/Speed Index	Type	Rim Width [inch]		Section Width [mm]	Overall Diameter [mm]
			Recommended/ Permitted			
32x11.50R15LT	113Q	TL	9	8.0 - 10.0	290	807
275/70R16	114Q	TL	8	7.0 - 9.0	279	792
215/75R16	103Q	TL	6	5.5 - 7.0	216	728



4 X 4 TYRES > MUD TERRAIN

Key Features




- The new steel belted radial construction of the "King of 4x4 Tyres".
- Superior tread design element enhances traction on loose ground, mud and snow conditions.
- Incorporates Silverstone's advanced directional "V" shape tread block design for superior self-cleaning capability and maximum performance even in the toughest terrain.
- Optimum void-to-rubber ratio provides superior traction in any off-road conditions.
- The sidewall block elements provide additional traction and thus reduce the chances of getting stuck in deep gumbo mud conditior
- Reinforced full width steel belts and robust casing construction enhance puncture and bruise resistance.
- Specially formulated tread compound provides exceptional cutting and chipping resistance

MT-117 SPORT

Tyre Size	Load/Speed Index	Type	Rim Width [inch]		Section Width [mm]	Overall Diameter [mm]
			Recommended/ Permitted			
31x10.50R15LT	109S	TL	8.5	7.0 - 9.0	268	781
33x12.50R15LT	108Q	TL	10	8.5 - 11.0	318	832
265/70R16	112Q/S	TL	8	7.5 - 9.0	272	778
285/75R16	116Q	TL	8	7.5 - 9.0	286	840



4 X 4 TYRES > MUD TERRAIN

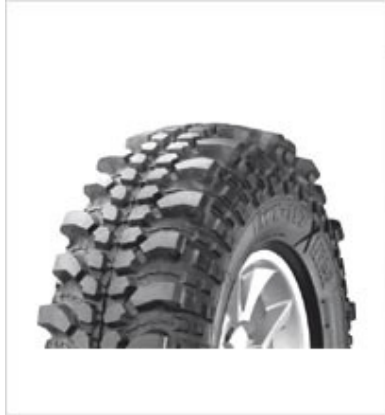

Key Features

- **LIGHT WEIGHT** - Special light weight construction design and supple sidewall provide excellent traction when driving through deep gumbo mud.
- **OPEN BLOCK TREAD DESIGN** - Open block tread design enhances mud digging and self cleaning capabilities for superior traction
- **TREAD COMPOUND** - Specially formulated silica-based tread compound minimizes tread cutting and chipping to provide superior traction.

MT-117 XTREME

Tyre Size	Load/Speed Index	Type	Rim Width [inch]		Section Width [mm]	Overall Diameter [mm]
			Recommended/ Permitted			
31x10.50-15LT	110L	TL	8.5	7.0 - 9.0	268	781
33x9.50-15LT	113L	TL	7.5	6.5 - 8.5	240	832
33x10.50-15LT	115L	TL	8.5	7.0 - 9.0	268	832
35x10.50-15LT	120L	TL	8.5	7.0 - 9.0	268	883
35x11.50-15LT	122L	TL	9	8.0 - 10.0	290	883
31x10.50-16LT	109L	TL	8.5	7.0 - 9.0	268	781
33x9.50-16LT	112L	TL	7.5	6.5 - 8.5	240	832
33x10.50-16LT	114L	TL	8.5	7.0 - 9.0	268	832
35x10.50-16LT	119L	TL	8.5	7.0 - 9.0	268	883
35x11.50-16LT	120L	TL	9	8.0 - 10.0	290	883